

705740 Camera Drape

Product details


Size: 8cm x 120cm

Descriptive feature: Plain tip

Color: Transparent

Sterility: Sterile

Images

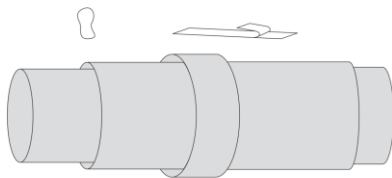

Delivered items

705740-14

Country of origin: Thailand

Shelf life: 5 years

Sterilization method: Gamma

Packing information: First packaging layer is a peel-open sterile barrier, plastic/plastic. Once opened the sterile barrier cannot be closed again. Second layer is a corrugated board dispenser box. Third layer is a corrugated board transport box.

Packaging level	Pack count	GS1 code
Consumer pack	1	7323190030415
Dispenser box	30	7323190028863
Transport box	120	7323190028856
Pallet	5760	7323190028849

Material

Phthalates:

No

Polyvinyl chloride:

No

Product Composition Drapes

Product Component	Critical Area	Less Critical Area
Drape material	N/A	Polyethylene film 50 µm, transparent

Product Performance Sterile Drapes, EN 13795 High Performance

Characteristic	Test Method	Internal Test Method	Unit	Requirement Critical Product Area	Requirement Less Critical Product Area	Product Performance Critical Product Area	Product Performance Less Critical Product Area
Resistance to microbial penetration - Dry	ISO 22612	T-1004	CFU	Not required	≤300	N/A - no critical product area	0
Resistance to microbial penetration - Wet	ISO 22610	T-1005	BI	6.0	Not required	N/A - no critical product area	-
Cleanliness - Particulate Matter	EN ISO 9073-10	T-1006	IPM	≤3.5	≤3.5	N/A - no critical product area	N/A 1-ply PE-film
Linting	EN ISO 9073-10	T-1006	Log ₁₀ (lint count)	≤4.0	≤4.0	N/A - no critical product area	N/A 1-ply PE-film
Resistance to liquid penetration	EN 20811	T-280	cm H ₂ O	≥100	≥10	N/A - no critical product area	>100
Bursting strength - Dry	EN ISO 13938-1	T-233 or T-1179	kPa	≥40	≥40	N/A - no critical product area	73

Characteristics	Test Method	Internal Test Method	Unit	Requirement Critical Product Area	Requirement Less Critical Product Area	Product Performance Critical Product Area	Product Performance Less Critical Product Area
Bursting strength - Wet	EN ISO 13938-1	T-233 or T-1179	kPa	≥40	Not required	N/A - no critical product area	-
Tensile strength - Dry	EN 29073-3	T-229	N	≥20	≥20	N/A - no critical product area	34
Tensile strength - Wet	EN 29073-3	T-229	N	≥20	Not required	N/A - no critical product area	-

Product Performance Drapes, Additional Tests

Characteristics	Test Method	Internal Test Method	Unit	Product Performance Critical Product Area	Product Performance Less Critical Product Area
Absorption	ISO 9073-12	T-1158	g/dm ²	N/A	N/A
Flammability	16 CFR 1610.4	N/A	s	Class I, >3.5s	Class I, >3.5s